	DocuPrint™ 155MX, 180, 135MX, 115MX,	Speed:	22 m/m*
	DocuTech [™] 155, iGen [™] 150, 8250, iGen 4 [®] , iGen 5 ^{®,} 800i/1000i, Versant [®] 2100, 80, J75,		3.700 sheets SRA3 / hour* 1.800 sheets B2 / hour*
xerox	C60/C70 and previous models.	Sheets sizes and	Min: 220 x220mm
	Bizhub PRESS C8000e, C700, C7000P, C6000, C1100, C1085, C1070,C1070P, C1060, C70hc,	weights:	Max: 530 x 750mm 130 – 350 g/m ²
KONICA MINOLTA	2250P, 1250, 1250P, 1052 and previous. Bishub PRO C6000, C6000L, C1070, C1060, C1060L, and previous models imagePRESS C800, C700, C600I, C7011VP,	Feeder system:	Pneumatic feeder with two air suction units, on transport conveyor, four frontal stops, 600 mm stack height and 200 kg capacity an +/- 1 m overlap tolerance.
Canon océ	C7011VPA, C6011VP, C6011VPS, C6011S, C6011, C700VPe, imageRUNNER ADVANCE c9280 PRO, C9070 PRO, Océ ColorStream 3000 Twin series, JetStream Compact series,	Lamination unit:	Thermal oil sealed heating roller. Pressure rolle controlled by independent dual pneumatic pist system with a máximum pressure of 101 New mm linear. Pneumatically driven decurling bar.
	JetStream Dual series, JetStream Wide series, 2000 Flex and previous models. C9100, C9110, Pro C5100S, C5110S, C751EX,	Cutting unit:	Ultra strong pneumatic micro perforation. Independent speed control of cutting rollers wi dedicated drive motor.
RICOH InfoPrint Solutions	InfoPrint [®] 5000 Multi-Purpose Platform, General Production Platform, Volume Platform and previous models.	Safety and protection:	CE compliant, emergency stops and security sensors. Continuous equipment protection monitoring o
	HP Indigo 10000, 7800, 5600, 3550, W7250, WS6600p, 30000, 20000, WS6800, WS4600 and previous models.	* According to film on	feeding, pressure and heating systems.
Kodak	NEXPRESS SX, DIGIMASTER HD, VERSAMARK and PROSPER.	* According to film, external conditions, paper type, thickness and forma DIMENSIONS AND WEIGHT	
FUJ¦FILM	Jet Press 720 and Jet Press 540 W	Sta	Length: 2100 mm
XEIKON	Xeikon 8500 and 860.		Width: 1150 mm Height: 1600 mm
MGİ	Meteor DP8700 XL+, Meteor DP8700 S+, Me- teor DP8700 XL+ DF Pro andJETvarnish 3D.		
🗞 SCODIX	Scodix Ultra, Rainbow and S Series.	Kg	750 Kg
Ve continuously keep	tests on request with no questions asked. updating validations in current digital printing without obligations!	Ţ	400 V 3-phases 13A 50 - 60 Hz 8 kW

9 BA SYSTER Pneumatic feeder with two air suction units, one 600 mm stack height and 200 kg capacity and





BAGEL SYSTEMS S.L. Tirso de Molina nº 36 A, nave 3B 08940 Cornellà del Llobregat Barcelona, Spain.

Tel +34 934 748 023 +34 617 085 546 info@bagelsys.com www.bagelsys.com





for the graphic arts and packaging industry.

Market leader with the integration technology of OMRON technology for finishing equipment, Bagel Systems delivers the best offset and best digital laminate productivity ratios.



Systems SL. Bagel Systems has a policy of continuous improvement and reserves the right to amend any above specification without prior notice.







PERFORMANCE IN LAMINATION TAKEN RIGHT TO THE EDGE

Robust and ultra-compact construction Constant quality laminate Up to 3.700 sheets per hour

DIGIFAV B2

Solely conceived for offset and digital high performers, DIGIFAV B2 is our professional laminator for the finest and most demanding print scenarios.

We all have something unique to offer. DIGIFAV B2 grounded on an industrial build up, it is our cross over that proves to be strong on aspects some times opposed, accessible but yet ultra-compact, easy to use but technology intense, low in consumption but powerful, large productions but yet delicate with prints and minimum wastes.

Book Covers // Photo book // Menus // Sport cards // Visit cards // Catalogues // Adverts // Greetings cards // Kid's book // Graphic supports // Luxury bags // Sales docs // Posters.

And also now: Cosmetic packaging // luxury products packaging // anti-bacterial hospital material packaging.

Superior quality

With best in class lamination technology, the **DIGIFAV B2** features unmatchable finishing consistency. Our oil filled heated roller system ensures uniform distribution and retention of temperature across the whole surface. Intelligent temperature program and quality components prevent overheating.

Robust

With its solid steel base and tower construction. **DIGIFAV B2**'s roller calibration is lifetime guaranteed. The 200kg feeder pile capacity, 100.5 Newton / mm roller pressure and ability to burst up to 75 micron films are testament to the durable construction.

Easy to use

The height adjustable, rotating touch screen with auto start function, fast film loading system, automatic temperature regulation, multi system security monitoring, all ensure rapid start up and production.

Productivity

Allows speeds up to 3.700 sheets per hour, input pile up to 600 mm height. **DIGIFAV B2** is able to operate 2 and 3 shifts a day. The ability to dissipate offset spray powder together with automatic film loading and start up, minimise production down time and reduce job change overs to under 5 minutes.





Feeding module



Laminating module.



Delivery table with air fans.




feed table using two

conveyor.

suction units and transport

Table jogger.

DIGIFAV B2 Work flow

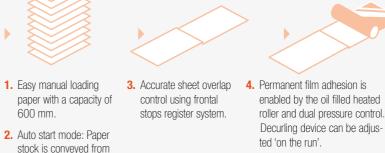


Decurling device can be adjus-



hand pallet truck or forklift.



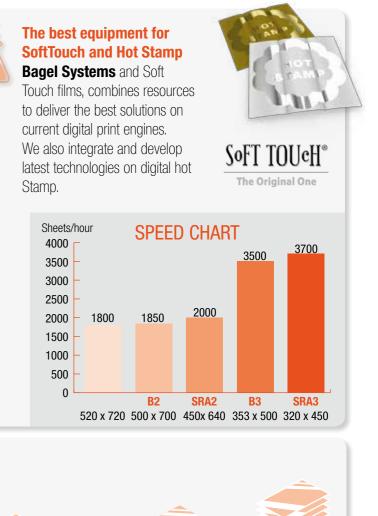



- 5. Laminating film is micro-perforated on the overlap by our robust marking device and then separated by the pneumatic cutting rollers.
- 6. The possibility of finishing are endless: gloss, matt, Soft Touch, anti scratch, metallized, embossed...All provide added value and ultimate protection on offset and digitally printed materials.





Digital HotStamp® module: La DIGIFAV B2 is available with an optional pallet Multifunctional devise that allows metallic foiling, varnidelivery pile system which can be unloaded using a shing, spot varnishing and cold lamination.