


# supaferro<sup>®</sup> : SELF-ADHESIVE FERRO SHEET WITH MATT WHITE VINYL

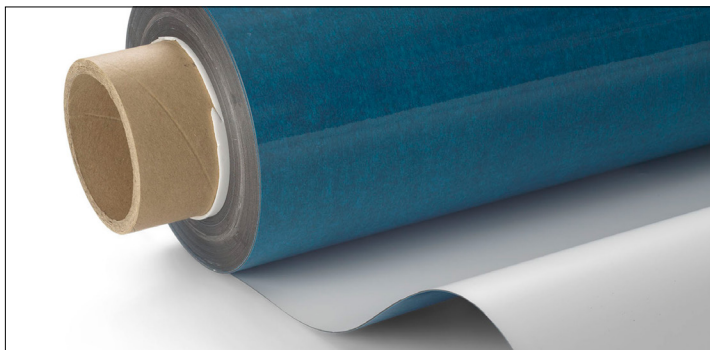

## Ferrous vinyl surface with adhesive

- Manufacturing process: calendered ferro + laminated vinyl/adhesive
- Material composition: 90% oxidised iron powder, 10% thermo plastic binder, free of PVC & phthalates, laminated one side with double sided adhesive & second side with matt white vinyl
- Adhesive: acrylic double sided P.S.A. with blue filmic release liner
- Magnetisation: N/A
- Pole pitch: N/A
- Density: 3.6g/cm<sup>3</sup>
- Colour: white
- Hardness: (Shore-D) – 33±5
- Working face: normally the matt white side
- Magnetic Stability: N/A
- Working temperature: -15°C to 30°C
- Storage temperature: -10°C and 35°C
- Compliance: **supaferro<sup>®</sup>** (SSF) conforms to EN71 part 3 & is REACH & RoHS approved
- Packaging: rolls supplied in cartons (wound on 3" core), cut sheets in cartons or on pallets

## MORE INFORMATION

[www.anchormagnets.com/pages/supaferro-flexible-iron-media](http://www.anchormagnets.com/pages/supaferro-flexible-iron-media)

### Disclaimer:

Published technical information concerning our products is based upon research, which, to the best of our company's knowledge & belief, is accurate & reliable.

Whilst the guidelines above will assist the purchaser in considering the suitability & performance of the product for each intended use, it remains the user's responsibility to satisfy themselves as to the suitability of such information for each particular use.

Therefore, Anchor Magnets Ltd & Anchor Magnets Europe, accepts no liability in the event of improper use or processing beyond our guidelines.