

EASY LITE AIR HEAT-ASSISTED TOP ROLLER LAMINATOR

Professional heat-assisted top roller laminator for self-adhesive materials. It allows to laminate and mount. Designed and manufactured completely in Italy.

COST-EFFECTIVE

Very good quality, price and performance

WORKING FLEXIBILITY

It mounts images on panels, applies double-sided adhesive films, application tape and protective films

EASY TO USE CONTROL PANEL

User friendly control panel to set working parameters

INTUITIVE PRESSURE CONTROL

Thanks to the pressure regulator and the gauge

TIME SAVING

Easy adjustments of the media thanks to the swing-up steel feed table and the ergonomic position of the shafts

LONG-TERM RELIABILITY AND SAFETY


LOW MAINTENANCE COSTS

MADE IN ITALY

Designed and manufactured completely in Italy

SUITABLE FOR:

- > Floor graphics / window graphics / Backlit display
- > Trade shows graphics
- > Roll-up banners / Pop-up / Stickers
- > Rigid boards and flexible media
- > Table top displays
- > Car wrapping
- > Membrane keyboards / Pre-spaced stickers
- > Many more..

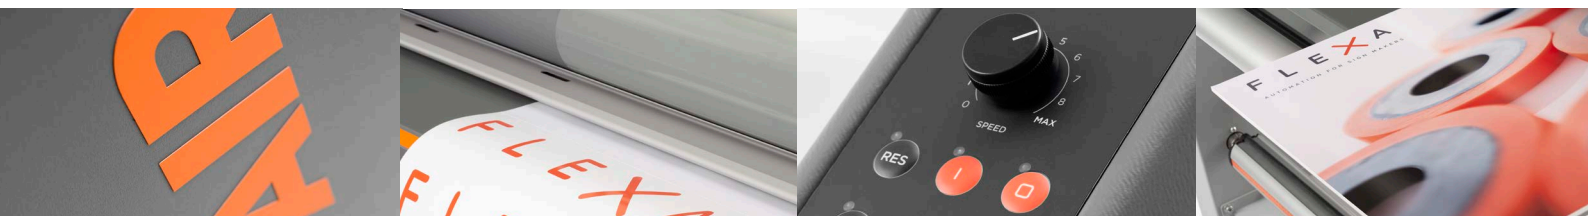

FRONT SIDE

BACK SIDE



Pneumatic lifting of the upper roller by buttons positioned on the front and back side



Gauge to display the pressure of the upper roller



Pressure regulator of the upper roller



Aluminum shafts with automatic locking system and millimeter scale



Control panel for adjusting temperature, speed and many more parameters



Rewinding clutched shaft for adjusting the tension of the liner

Unwinding braked shaft for adjusting the tension of the lamination film


Security sensor with emergency stop function for safety

Unwinding braked shaft for adjusting the tension of the media to be laminated

Rewinding clutched shaft for adjusting the tension of the laminated media (optional)




Swing-up steel feed table for quick set-up



Feed-in guide (optional)



Feeding control by hand (control panel) or foot pedal (hand free operation)



Front tray for prints (optional)

Working width	1600 mm (65 in)
Max. space between rollers	40 mm (1,6 in)
Coated rubber rollers	Ø 116 mm (4,6 in)
Heated upper roll preset	30°, 40°, 50° C
Max. speed	5 m/min (16 ft/min)
Working height	900 mm (35 in)
Power supply	230 V - 50 Hz - 2500 W
Dimensions (W x D x H)	2000 x 660 x 1570 mm (79 x 26 x 62)
Weight	215 kg (474 lbs)



It works with air compressor (not included).


Manufactured in compliance with CE regulations




Follow us:



Distributor



100% Made by FLEXA



100% Made in Italy