


CoBo-Stack 10i




PALLETIZING SYSTEM

Technical specifications



PALLETIZING SYSTEM


CoBo-Stack 10i



Technical Specifications		CoBo-Stack 10i					
Pallet size	min.	300 mm x 300 mm (11 3/4" x 11 3/4")					
	max.	EPAL 800 mm x 1,200 mm (31 1/2" x 47 1/4")					
Stack height on pallet	max.	1,400 mm (55 inch)					
Gripper – formats	Gripper	XS	S	M	XL	M - Book block	Option: Landscape format only with gripper M
		Product length in mm	148–320	210–370	210–370	210–370	
	Product width in mm	95–160	95–160	155–235	205–285	145–225	285–360
Gripper – Height of individual stacks	min. in mm	60	60	60	60	60	60
	max. in mm	125	150	150	150	205	150
Stack weight	max.	6 kg (13 lb)					
Stacks per hour		300 stacks/h					
Infeed height		– Standard height: 793 mm–923 mm (31 1/4"–36 1/4"), adjustable in 10 mm (3/8") steps – Optional special height, suitable for example for Horizon PSX-56: 734 mm–864 mm (28 3/4"–34"), adjustable in 10 mm (3/8") steps, the maximum pallet height is reduced by 60 mm (2 3/8")					
Electrical supply		100–240 V – 50/60 Hz – 9 A					

Technical Drawing Floorplan CoBo-Stack

Measurements: mm
inch

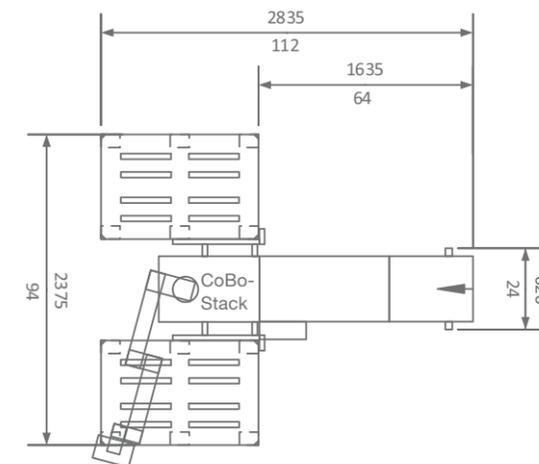

MBO Postpress Solutions GmbH
Grabenstrasse 4–6 / 71570 Oppenweiler / Germany
Phone +49 (0) 7191 46-0 / www.mbo-pps.com

Your contact partner

INFO@MBO-PPS.COM

This brochure is subject to change without notice. The technical specifications vary depending upon paper quality.

07/2025_v2

